


# G-R 1995

## Synthetic Resin

Stick with Valco®

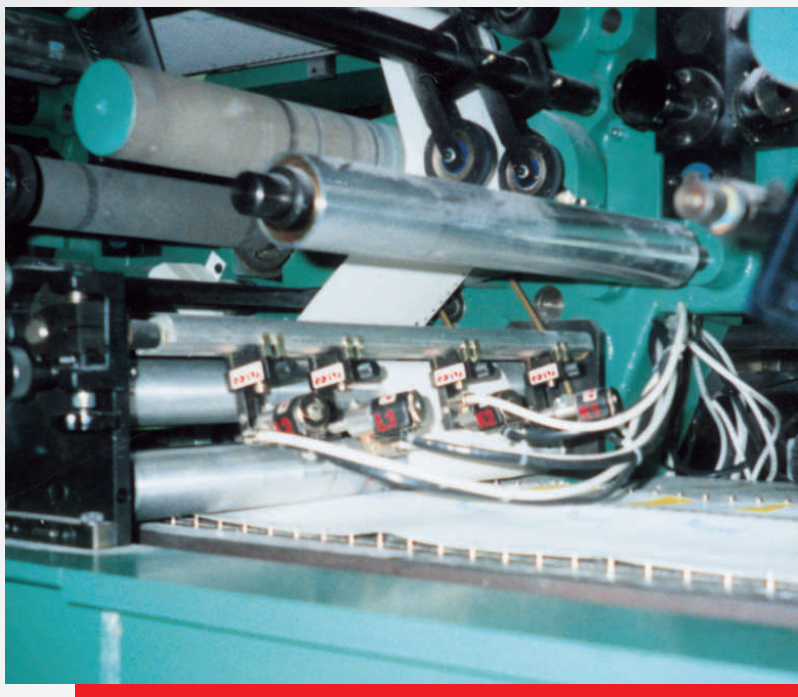

### Product Type:

Synthetic resin

### Physical Properties:

Appearance: White, fluid product

Solids: Approximately 53-59%

Viscosity: Approximately 450-550 cps

pH: Approximately 5.5-6.3

LBS/gallon: Approximately 8.88-9.08

### Suggested Use:

Graphic arts applications, coated stock.

### Operating Conditions:

Fine-line and non-contact extrusion systems.

- Stir thoroughly before using.
- Ready-for-use viscosity as supplied.
- Wet film soluble in warm water.
- Dry film soluble in water.

### Precautions:

- Protect from temperatures below 40° F.
- Rotate stock, using oldest material first.
- Keep covered to prevent drying out and contamination.
- Do not mix with other adhesives.

### Ordering Information:

**Part Number:** 713xx023, 5-gallon pail  
713xx024, 55-gallon drum  
713xx025, 300-gallon tote



**Valco Cincinnati, Inc.**  
411 Circle Freeway Drive  
Cincinnati, OH 45246  
Tel: (513) 874-6550  
Fax: (513) 874-3612  
www.valcocincinnatiinc.com  
sales@valcocincinnatiinc.com

**Shure-Glue/Melton**  
457 Circle Freeway Drive  
Cincinnati, Ohio 45246  
Tel: 513.874.5581  
Fax: 513.874.8318  
sales@shure-glue.com  
www.shure-glue.com

**Vansco Systems, Inc.**  
2652 Lashbrook Avenue  
South El Monte, CA 91733  
Tel: 626.448.7611  
Tel: 626.448.0221  
sales@vansco.com  
www.vansco.com

**Valco Cincinnati, Ltd.**  
Unit 7-8  
Hortonwood 32  
Telford, TF1 7YN  
Tel: (44) 1952 677911  
Fax: (44) 1952 677945  
sales@valco.co.uk  
info@meltondirect.com

**Valco Cincinnati GmbH**  
Storkower Strasse 6  
D-15749 Gallun  
Tel: (49) 33764 8700  
Fax: (49) 33764 87070  
info@valcogmbh.de  
www.valcogmbh.de

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full scale production make their own test to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purposes under their own operating conditions. No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, covered by any patent, without the authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care program.